

Ara-N

Voice Digital Modules

ARA-N Digital Voice Modules for announcements and music in the lifts and for many other applications.

Ara-N20



SPECIFICATIONS:

- **8 Input pins**
- **Standard Messages** included
- **Internal Flash Memory** 32 Mb
- **Easy Programming** with SD Card
- **Audio Format** PCM WAV 8bit up to 32KHz
- **Volume settings**
- **Audio output Amplifier** 3 Watt, 4 Ohm
- **Messages:** 8 in Singol Modality / up to 255 in Binary and/or Serial Modality
- **Operation Modalities:** Single (one wire per floor), Binary, Gray, Serial
- **Power Supply** 12÷24 Vdc
- **Power consumption max.** 240mA @ 24V
- **Metal Box**

Ara-N100



SPECIFICATIONS:

- **24 Input pins**
- **Standard Messages** included
- **Internal Flash Memory** 64 Mb
- **Easy Programming** with SD Card
- **Audio Format** PCM WAV 8bit up to 32KHz
- **Volume settings**
- **Input** for volume reduction
- **Audio output Amplifier** 3 Watt, 4 Ohm
- **Messages:** 24 in Singol Modality / up to 255 in Binary and/or Serial Modality
- **Operation Modalities:** Single (one wire per floor), Binary, Gray, BCD, Serial or Mixed
- **Power Supply** 12÷36 Vdc
- **Power consumption max.** 240mA @ 24V
- **Metal Box**

Why to choose ARA-N Voice Digital Modules?

New ARA-N Digital Voice Modules find specific use both in old and new lifts. They play high quality voice messages and/or music files; they are provided already configured according to customer needs and can be updated and programmed simply through an automatic process with SD-CARD.

Messages are recorded by professional speakers in different languages.

Visit our website www.teledif.it

Ara-N

Voice Digital Modules


ARA-N20 SW Voice Digital Module is the ideal solution for escalators and open spaces.

Ara-N20 SW



SPECIFICATIONS:

- **8 Input pins**
- **Standard Messages** included
- **Internal Flash Memory** 32 Mb
- **Easy Programming** with SD Card
- **Audio Format** PCM WAV 8bit up to 32KHz
- **Volume settings**
- **Audio output Amplifier** 15 Watt, 4 Ohm
- **Integrated Loudspeaker**
- **Messages:** 8 in Singol Modality / up to 255 in Binary and/or Serial Modality
- **Operation Modalities:** Single (one wire per floor), Binary, Gray, Serial
- **Power Supply** 12÷24 Vdc
- **Power consumption max.** 240mA @ 24V
- **ABS Box**

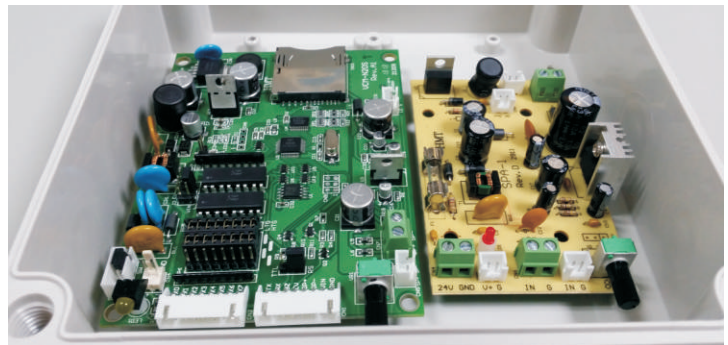

Why to choose ARA-N20 SW Voice Digital Modules?

New ARA-N20 SW Voice Digital Modules are the ideal solution for escalators and open spaces. They play high quality voice messages and/or music files; they are provided already configured according to customer needs and can be updated and programmed simply through an automatic process with SD-CARD. Messages are recorded by professional speakers in different languages.

Visit our website www.teledif.it